


DESCRIPTION OF PARTS	
LED recessed luminaire, Body in die-cast aluminium, powder coated, Splay springs, Reflector in aluminium, incl. remote power supply	
TECHNICAL DATA	

Dimensions  $\varnothing$  160, H135 mm | Ceiling cutout:  $\varnothing$  150 mm  
 Swivelling: 45° | Rotatable 355°

Not dimmable | Protection class: II | Protection class: IP20 | installation site: interior


	White	White/black	Black	Black/white	
27W / 220-240V / AC750mA					
4000K	BWL-30NW1	BWL-30NW1-2	BWL-30NW2	BWL-30NW2-1	30°
3500K	BWL-30WNW1	BWL-30WNW1-2	BWL-30WNW2	BWL-30WNW2-1	30°
3000K	BWL-30WW1	BWL-30WW1-2	BWL-30WW2	BWL-30WW2-1	30°
2700K	BWL-30SW1	BWL-30SW1-2	BWL-30SW2	BWL-30SW2-1	30°
4000K					
4000K	BWL-30NW1F	BWL-30NW1-2F	BWL-30NW2F	BWL-30NW2-1F	60°
3500K	BWL-30WNW1F	BWL-30WNW1-2F	BWL-30WNW2F	BWL-30WNW2-1F	60°
3000K	BWL-30WW1F	BWL-30WW1-2F	BWL-30WW2F	BWL-30WW2-1F	60°
2700K	BWL-30SW1F	BWL-30SW1-2F	BWL-30SW2F	BWL-30SW2-1F	60°
41W / 220-240V / AC1050mA					
4000K	BWL-40NW1	BWL-40NW1-2	BWL-40NW2	BWL-40NW2-1	30°
3500K	BWL-40WNW1	BWL-40WNW1-2	BWL-40WNW2	BWL-40WNW2-1	30°
3000K	BWL-40WW1	BWL-40WW1-2	BWL-40WW2	BWL-40WW2-1	30°
2700K	BWL-40SW1	BWL-40SW1-2	BWL-40SW2	BWL-40SW2-1	30°
4000K					
4000K	BWL-40NW1F	BWL-40NW1-2F	BWL-40NW2F	BWL-40NW2-1F	60°
3500K	BWL-40WNW1F	BWL-40WNW1-2F	BWL-40WNW2F	BWL-40WNW2-1F	60°
3000K	BWL-40WW1F	BWL-40WW1-2F	BWL-40WW2F	BWL-40WW2-1F	60°
2700K	BWL-40SW1F	BWL-40SW1-2F	BWL-40SW2F	BWL-40SW2-1F	60°

Light source: CITIZEN ELECTRONICS Co., LTD.


BWL-30NW	CLU038-1208C4-403H5M3-F1	BWL-40NW	CLU48-1211C4-403H5M3-F1
BWL-30WNW	CLU038-1208C4-353H6M3-F1	BWL-40WNW	CLU48-1211C4-353H6M3-F1
BWL-30WW	CLU038-1208C4-303H5M3-F1	BWL-40WW	CLU48-1211C4-303H5M3-F1
BWL-30SW	CLU038-1208C4-273H5M3-F1	BWL-40SW	CLU48-1211C4-273H5M3-F1

This luminaires contains one light source of energy efficiency class E

The product consists of two components. Luminaire with light source and internal power supply.




The light source is only exchangeable by a professional.







The LED driver is only exchangeable by a professional.

	Protection class II		Notification of Risks		LED luminaire is not dimmable
	CE label		Safety Instructions		
	The product is only for use in interiors.		Cleaning Instructions		
	The product may not be disposed of in the household garbage.		Do not cover the luminaire with insulating material		
	Don't look directly into the LED! The LED is that bright that it might damage your eyes!		Installation only by qualified and authorised persons		

SAFETY	
	<p>READ THE INSTRUCTIONS BEFORE USING THIS PRODUCT. KEEP THE SAFETY AND OPERATING INSTRUCTIONS FOR FUTURE USE.</p>


The warranty claim and guarantee is rendered invalid in the event of damage to the product, which is caused by not following the operating instructions. We are not liable for the consequent damage. Because of specific characteristics of LED's (life, deviation in colour etc.) we formulated special terms for planing and installing our LED products.They are part of these installation manual! Should they not be available, request them please!

SAFETY INFORMATION	
--------------------	--

	<ul style="list-style-type: none"> <li>The light is suitable for lighting purpose indoors.</li> <li>The LED light is provided for load-bearing and suspended ceiling with ceiling cut-out according to data sheet. Sizes see technical data.</li> <li>Do not attach any additional loads such as decorations and / or signs to the luminaire!</li> </ul>
	<ul style="list-style-type: none"> <li>Don't install under power.</li> <li>Follow the instruction manual for installation.</li> <li>Installation only by qualified and authorised persons.</li> <li>Do not use the product when it has been damaged (defective covers) or there are operational faults such as flickering, smoking, steaming, crackling noises or the smell of smoke.</li> <li>A damaged or defective product must be changed or repaired by the manufacturer, a service person or a comparable qualified person.</li> </ul>
	<ul style="list-style-type: none"> <li>Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.</li> <li>Never open one of the electrical operating agents or plug any objects into them. Such procedures signify a danger to life through electrical shock.</li> <li>Absolutely avoid contact between the product and water or other liquids. For reasons of electrical safety, the light may not be placed in contact with water or other liquids or submerged in water.</li> <li>The product may not be changed or modified.</li> <li>Don't look directly into the LED! The LED is that bright that it might damage your eyes!</li> <li>The luminaire must not be exposed to high levels of dust.</li> </ul>
	


MAINTENANCE AND CLEANING	
--------------------------	--

The light source is only exchangeable by a professional.

	<ul style="list-style-type: none"> <li>Do not use solvents, such as benzene and similar agents.The light would be damaged thereby.</li> <li>Only use a dry, lint-free cloth for cleaning the product.</li> </ul>
---	--






DISPOSAL	
----------	--

The packaging consists of environmentally friendly materials. Dispose of them in the local recycling containers.

	<p>Do not dispose of this product in the household garbage when it has reached the end of its lifecycle, but rather take it to a disposal center. Your local officials will provide you with information about collection offices and their business hours.</p>
---	---

BWL	
LED recessed luminaire	
BWL-30	BWL-40



	Weiß
	Weiß/schwarz
	Schwarz
	Schwarz/weiß
	

INTENDED USAGE	
----------------	--

This product will only serve the purpose of illumination.

SCOPE OF DELIVERY	
-------------------	--

LED recessed luminaire incl. remote power supply  
 Set of instructions for assembly, operation and safety

TECHNICAL CHANGES	
-------------------	--


Changes in the sense of technical progress can be made without prior notice.

address | contact

A.L.S. GmbH  
 Mastorter Str. 31 | 88069 Tettnang (Germany)  
 Tel.: +49 (0) 75 42 93 44-0 | Fax.: +49 (0) 75 42 93 44-30  
 E-Mail: info@als.de | Web: www.als.de



**01** Switch off before installation. Switch on only after complete installation and examination of the circuit. Professional electrician for installation and maintenance only. Turn Off power supply before starting any installation. Read instructions & check you have all the tools and accessories to complete the installation correctly.

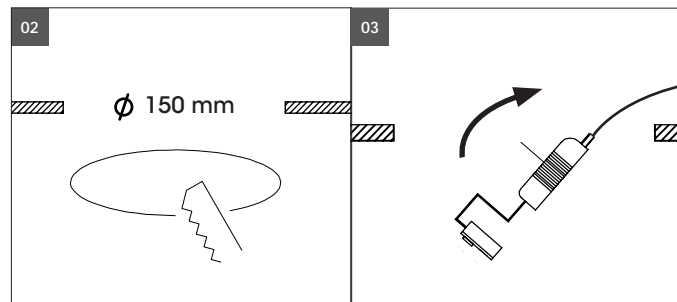


**Accessories (not included)**

Adapter ring for BWL  
with existing ceiling  
cutout Ø175 mm


**White**  
Art.-Nr. **Z-RBWL1**

**Black**  
Art.-Nr. **Z-RBWL2**





**Fixing materials:**

The warranty is void if the buyer or a third party repairs or modifies the luminaire.

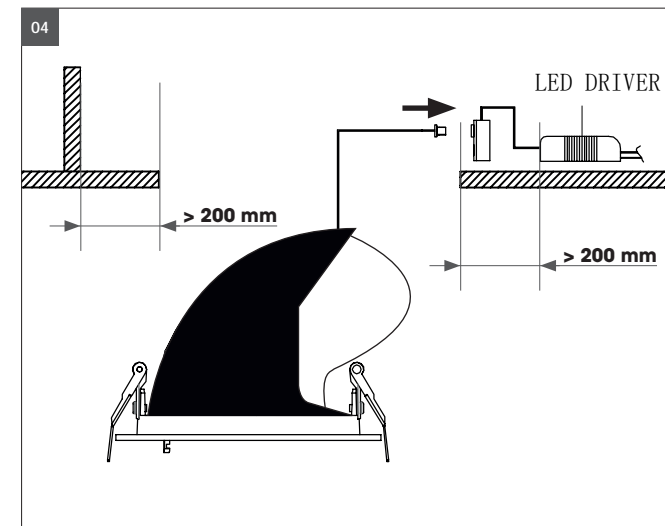

**03** Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.



**Please note!** The distance between the LED luminaire and the provided LED power supply, and the distance between the LED luminaire to a wall must be more than 200 mm.

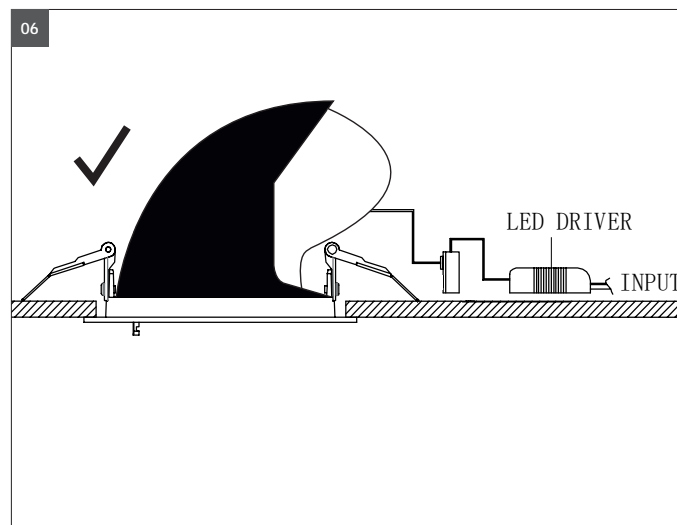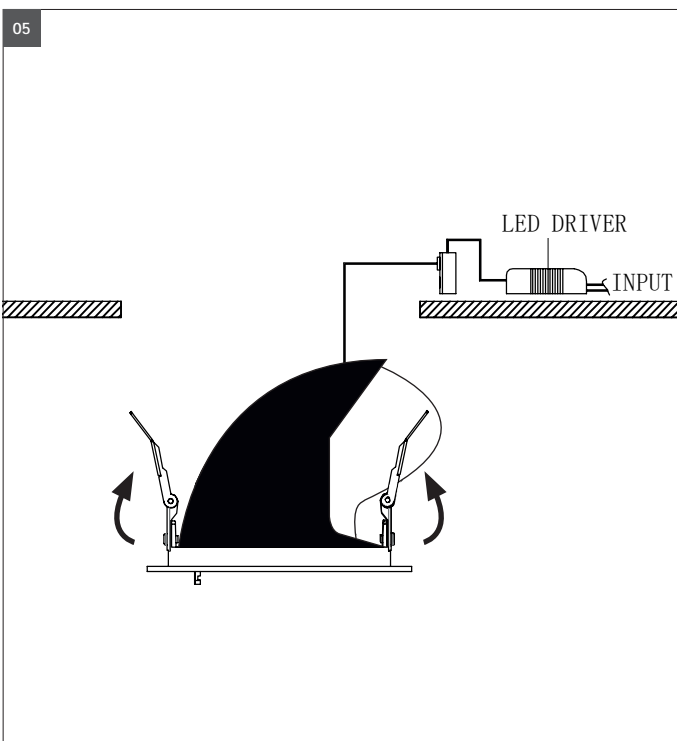

**Technical note:**

The recessed luminaire should not exceed the ambient temperature of 40° C! When using an installation box, ensure sufficient convection.

Another installation / assembly / materials / types than provided in the manual sheets, release us from any electrotechnical and electrostatic responsibility.

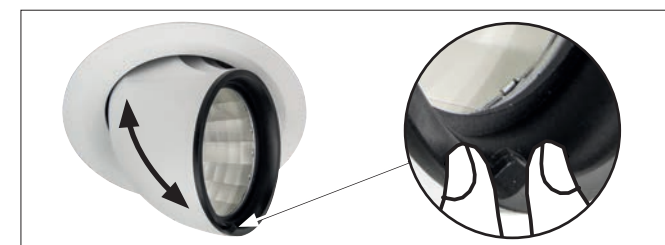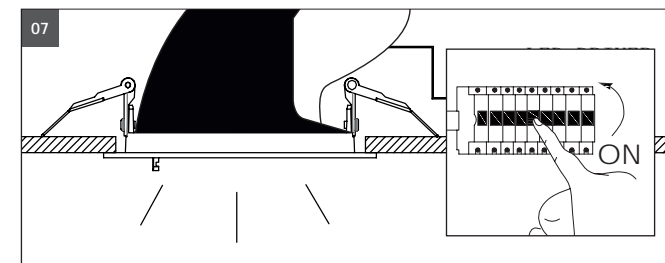

**07** After installation and connection, switch on the mains voltage all-pole. Switch on the associated circuit breaker or turn the fuse on.



Avoid looking too long in the light exit near the light, they could damage your eyes.