


TRLMN-32WDD

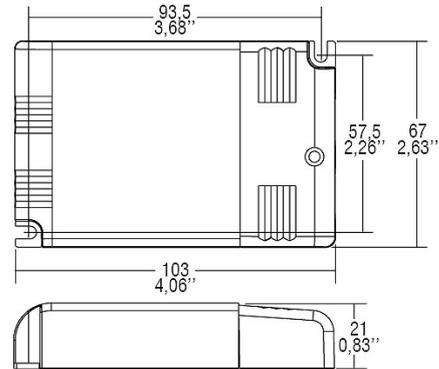

Adresse/Kontakt

Electronic Multi-Watt Power supply, dimmable, for LED´s

- Input Voltage: 220..240V AC; 110..127V AC; 50..60 Hz; SELV
- DC Range: 170..280V DC

- Pout 17W
- Iout 350mA const.
- Uout 5 - 48V (max. 59V)

- Pout 32W
- Iout 700mA const.
- Uout 3 - 46V (max. 59V)

- Pout 10W
- Iout 900mA max.
- Uout 12V const.

- Pout: 20W
- Iout: 830mA max.
- Uout: 24V const.

- Iout: 250/300/350/400/450/500/550/600/650/700mA const.

- Emergency power capable
- Dimmable via DALI
- Adjustable by Dip Switch
- Ripple free (max. 3%)
- With strain relief
- Protection against contact
- Protection class: 2
- ENEC
- Colour: white
- Dimension: L=103*W=67*H=21 mm

weight: 0,135 kg

Adresse/Kontakt