


TRL-13W24SL

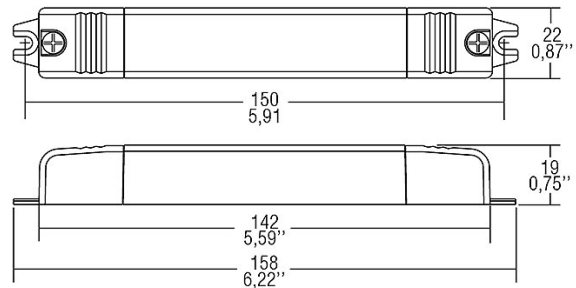

- Input Voltage: 220...240V AC / 50..60 Hz / 176...264V DC
- Pout: 13W
- Uout: 24V
- Iout: max. 540mA
- Emergency power capable
- Ripple free (max. 3%)
- Ambient temperature (ta): -25...+50° C
- Max. rated temperature (tc): 80° C
- With strain relief
- Protection against contact
- Housing: plastic
- Dimension: L=158*W=22*H=19 mm

protection class: 2

weight: 0,052 kg

colour: white

version: not dimmable

dimension: L=158*W=22*H=19 mm

INFO Power supplies: 13W, 24V

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de