


TRL-20W24

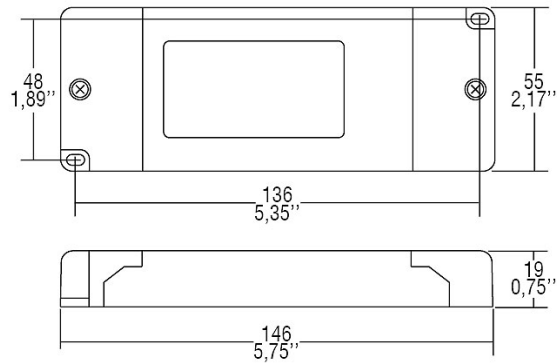

- Input Voltage: 220...240V AC / 50..60 Hz / 176...264V DC
- Pout: 20W
- Uout: 24V
- Iout: max. 830mA
- Emergency power capable
- Ripple free (max. 3%)
- Ambient temperature (ta): -25...+50° C
- Max. rated temperature (tc): 80° C
- With strain relief
- Protection against contact
- ENEC
- Housing: plastic
- Dimension: L=146*W=55*H=19 mm

connection voltage: 220-240V AC V

protection class: 2

weight: 0,038 kg

colour: white

version: not dimmable

INFO Power supplies: 20W, 24V

dimension: L=146*W=55 mm

Adresse/Kontakt