


UAL-100WWNW1

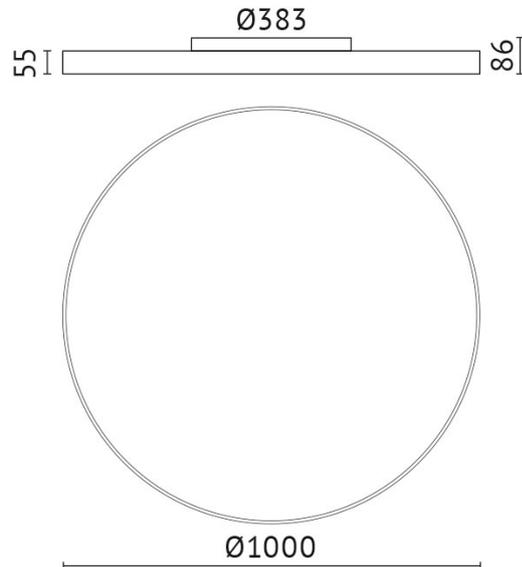

Light up with: SMD LED

System power: 95 W

colour rendering index: CRI >80

beam angle: 120 °

Power supply: Incl. OSRAM power supply

connection voltage: AC 220-240 V

protection class: 1

outside diameter: 1000 mm

colour: white

surface: Opal PMMA Diffusor

material: aluminum

INFO*: 3000K=8903lm (94 lm/W) 4000K=10002lm (105 lm/W) - switchable from 3000/4000K on the rosette inside.

dimension: H=86 mm

protection type: IP40

lifespan: > 50.000 h

ldt intern: 6.2021

EPREL Lichtquelle: [1195825](#)

EPREL Lichtquelle 2: [1195830](#)



Adresse/Kontakt