


FLEXYIP9-700NW

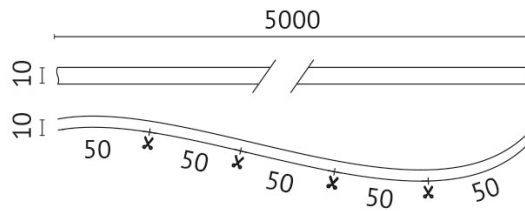

quantity lamps: 700

Light up with: SMD LED

System power: 48 W

Luminous flux: 4080 lm

colour temperature: 4000 K

colour rendering index: CRI >90

Power supply: has to be ordered separately

connection voltage: DC 24 V

system efficiency: 85 lm/W

protection class: 3

weight: 0,830 kg

version: with single sided connection cable

INFO*: 100 Segmente à 50 mm à 7 LEDs = 700 LEDs

dimension: L=5000*W=10*H=10 mm

protection type: IP66

EPREL Lichtquelle: [1162403](#)



Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de