


UDL-25SW2D

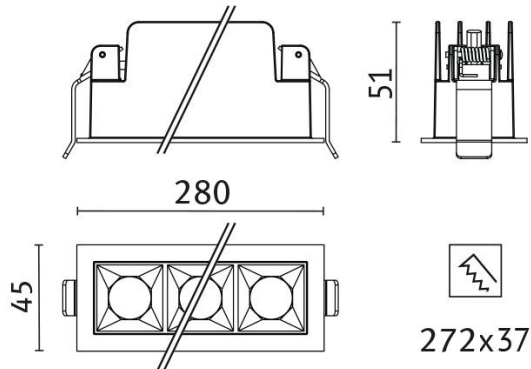

quantity lamps: 10

Light up with: LED linear light fitting

System power: 25 W

Luminous flux: 1310 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 36 °

Power supply: incl. external power supply

connection voltage: 220-240 V

system efficiency: 52 lm/W

protection class: 2

wall and ceiling cut: L=272*W=37 mm

colour: black

material: body in coated die-cast-aluminium

version: reflectors in PMMA, not dimmable

INFO*: Quick-release springs

dimension: L=280*W=45*H=51 mm

protection type: IP20

EPREL Lichtquelle: [1194667](#)



Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de