


PSLE-1500SW70

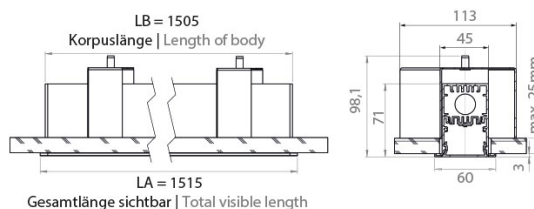

1510x50

Light up with: SMD LED

System power: 41 W

Luminous flux: 3182 lm

colour temperature: 2700 K

colour rendering index: CRI >80

Power supply: with power supply

connection voltage: AC 230 V

system efficiency: 78 lm/W

protection class: 1

wall and ceiling cut: W=48 mm


colour: anodized aluminium

material: extruded aluminium

version: recessed luminaire

dimension: L=1505*W=59,5*H=84,6 mm

EPREL Lichtquelle: [1189912](#)



Adresse/Kontakt