


PSLE-1200SW70



1210x50

Light up with: SMD LED
System power: 32 W
Luminous flux: 2507 lm
colour temperature: 2700 K
colour rendering index: CRI >80
Power supply: with power supply
connection voltage: AC 230 V
system efficiency: 78 lm/W
protection class: 1
wall and ceiling cut: W=48 mm
colour: anodized aluminium
material: extruded aluminium
version: recessed luminaire
dimension: L=1205*W=59,5*H=84,6 mm
EPREL Lichtquelle: [1189912](#)

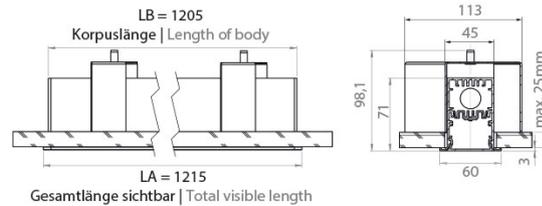

Adresse/Kontakt