


PSLE-1500NW70



1510x50

Light up with: SMD LED
System power: 41 W
Luminous flux: 3465 lm
colour temperature: 4000 K
colour rendering index: CRI >80
Power supply: with power supply
connection voltage: AC 230 V
system efficiency: 85 lm/W
protection class: 1
wall and ceiling cut: W=48 mm
colour: anodized aluminium
material: extruded aluminium
version: recessed luminaire
dimension: L=1505*W=59,5*H=84,6 mm
EPREL Lichtquelle: [1190289](#)

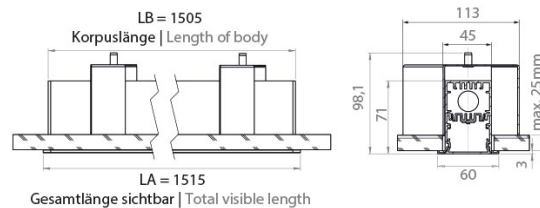

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de