


PSLU100-1500SW7P

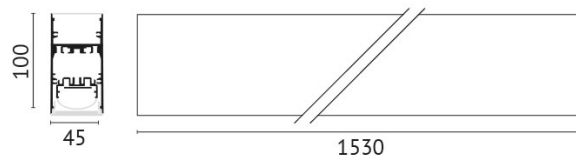

Light up with: SMD LED

System power: 57 W

Luminous flux: 4603 lm

colour temperature: 2700 K

colour rendering index: CRI >80

Power supply: with power supply

connection voltage: 220-240V AC V

system efficiency: 81 lm/W

protection class: 1

colour: anodized aluminium

material: extruded aluminium

version: light distribution: direct 65% / indirect 35%

UGR*: 19

dimension: L=1530*W=45*H=100 mm

EPREL Lichtquelle: [1190464](#)



Adresse/Kontakt