


PSL100-1500WW70

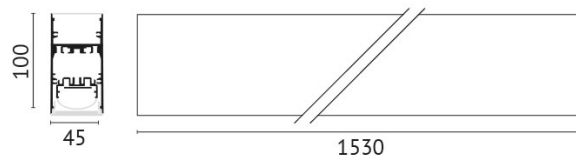

Light up with: SMD LED

System power: 57 W

Luminous flux: 5040 lm

colour temperature: 3000 K

colour rendering index: CRI >80

Power supply: with power supply

connection voltage: 220-240V AC V

system efficiency: 89 lm/W

protection class: 1

colour: anodized aluminium

material: extruded aluminium

version: light distribution: direct 67% / indirect 33%

dimension: L=1530*W=45*H=100 mm

EPREL Lichtquelle: [1190467](#)



Adresse/Kontakt