


PSLD100-1500SW70

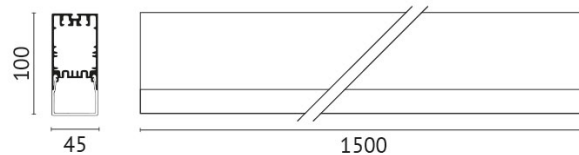

Light up with: SMD LED

System power: 42 W

Luminous flux: 4990 lm

colour temperature: 2700 K

colour rendering index: CRI >80

Power supply: with power supply

connection voltage: 220-240V AC V

system efficiency: 118 lm/W

protection class: 1

colour: anodized aluminium

material: extruded aluminium

version: direct light emission

ldt intern: 7.2021

dimension: L=1505*W=45*H=100 mm

EPREL Lichtquelle: [1190464](#)



Adresse/Kontakt