


PLG-30WW11

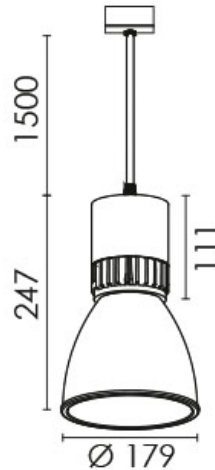

quantity lamps: 1

Light up with: SMD LED

System power: 30 W

Luminous flux: 1497 lm

colour temperature: 3000 K

colour rendering index: CRI >80

beam angle: 55 °

Power supply: with power supply

connection voltage: 220-240 V

operating current: 700 mA

system efficiency: 50 lm/W

protection class: 1

outside diameter: 179 mm

weight: 2,220 kg

colour: white

version: adapter

dimension: L=247 mm

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de