


## SUDR-92SW4D

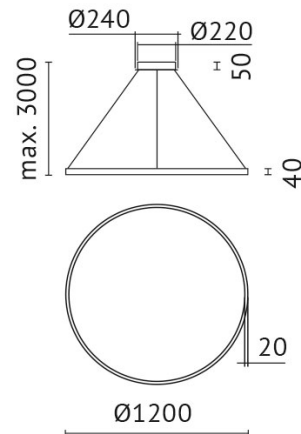

**Light up with:** SMD LED

**System power:** 92 W

**Luminous flux:** 5848 lm

**colour temperature:** 2700 K

**colour rendering index:** CRI >80

**beam angle:** 110 °

**Power supply:** Built-in electronic power supply inside ceiling rosette

**connection voltage:** 230 V

**system efficiency:** 64 lm/W

**protection class:** 1

**outside diameter:** 1200 mm

**weight:** 8,284 kg

**colour:** brushed brass

**material:** aluminum

**version:** direct/indirect polar distribution

**INFO Power supplies:** Dimmable (Triac)

**dimension:** H=40 mm

**lifespan:** 50.000 h

### Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH  
Mastorter Str. 31 | 88069 Tettnang (Germany)  
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30  
E-Mail: [info@als.de](mailto:info@als.de) | Web: [www.als.de](http://www.als.de)