


SUDR-50SW4D

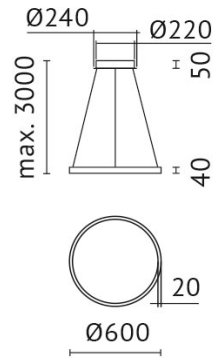

Light up with: SMD LED

System power: 57 W

Luminous flux: 3344 lm

colour temperature: 2700 K

colour rendering index: CRI >80

beam angle: 110 °

Power supply: Built-in electronic power supply inside ceiling rosette

connection voltage: 230 V

system efficiency: 59 lm/W

protection class: 1

outside diameter: 600 mm

weight: 4,650 kg

colour: brushed brass

material: aluminum

version: direct/indirect polar distribution

INFO Power supplies: Dimmable (Triac)

dimension: H=40 mm

lifespan: 50.000 h

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de