


## SUDR-50SW2D

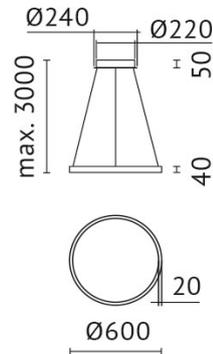

**Light up with:** SMD LED

**System power:** 57 W

**Luminous flux:** 3344 lm

**colour temperature:** 2700 K

**colour rendering index:** CRI >80

**beam angle:** 110 °

**Power supply:** Built-in electronic power supply inside ceiling rosette

**connection voltage:** 230 V

**system efficiency:** 59 lm/W

**protection class:** 1

**outside diameter:** 600 mm

**weight:** 4,650 kg

**colour:** matt black

**material:** aluminum

**version:** direct/indirect polar distribution

**INFO Power supplies:** Dimmable (Triac)

**dimension:** H=40 mm

**lifespan:** 50.000 h

### Adresse/Kontakt