


SUDR3-140SW2D-N

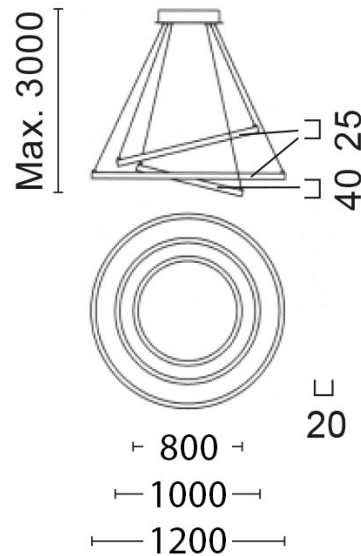

Light up with: SMD LED

System power: 140 W

colour temperature: 2700 K

colour rendering index: CRI >90

Power supply: Built-in electronic power supply inside ceiling rosette

connection voltage: 230 V

protection class: 1

weight: 13,600 kg

colour: matt black

material: aluminum

version: Smallest ring direct/indirect light emission

dimension: Ø 800/1000/1200 mm

lifespan: 50.000 h

INFO Power supplies: Dimmable (Triac)

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de