


SLC-30WNW12S

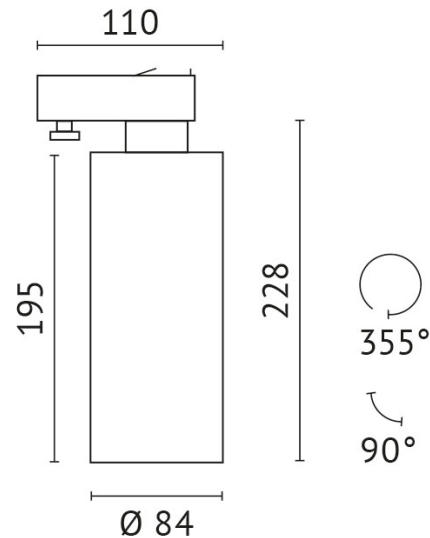

quantity lamps: 1

Light up with: CoB-LED

System power: 26 W

Luminous flux: 2305 lm

colour temperature: 3500 K

colour rendering index: CRI >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 89 lm/W

protection class: 2

outside diameter: 84 mm

colour: black

material: body in coated die-cast-aluminium, clear glass

version: EUTRAC®-3-phase-adaptor

INFO*: dimmable version, DALI or surface mounted with ceiling rose on request

protection type: IP20

EPREL Lichtquelle: [989282](#)



Adresse/Kontakt