


BLR-25WWSCW1

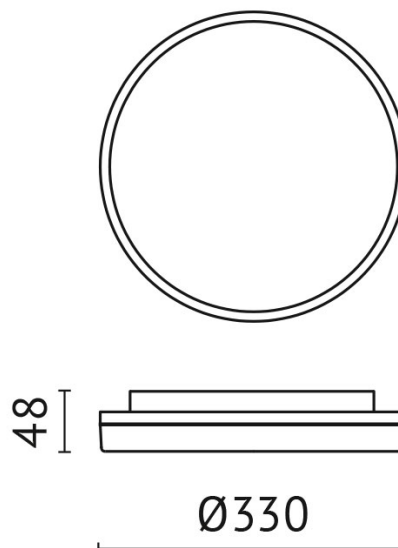

quantity lamps: 1

Light up with: SMD LED

System power: 25 W

Luminous flux: 2846 lm

colour rendering index: CRI >80

beam angle: 120 °

Power supply: with power supply

connection voltage: AC 230 V

system efficiency: 114 lm/W

protection class: 2

mechanical load: IK10

outside diameter: 330 mm

colour: white

material: PMMA

version: standard

INFO*: 3000K=2706lm (108 lm/W) 4000K=2790lm (112 lm/W), 6000K=2846lm (114 lm/W) - switchable between 3000K/4000K/6000K

protection type: IP54


dimension: H=48 mm

ldt intern: 8.2021

UGR*: 24,75

lifespan: 45.000 h

EPDF! Lichtquelle: [1201585](#)



Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de