


BLR-12WWSCW1

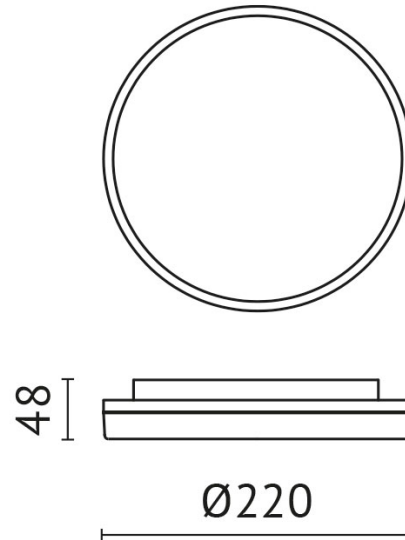

Light up with: SMD LED

System power: 12 W

colour rendering index: CRI >80

beam angle: 120 °

Power supply: with power supply

connection voltage: AC 230 V

protection class: 2

mechanical load: IK10

outside diameter: 220 mm

colour: white

material: PMMA

version: standard

INFO*: 3000K=1297lm (108 lm/W) 4000K=1337lm (111 lm/W), 6000K=1364lm (114 lm/W) - switchable between 3000K/4000K/6000K

lifespan: 45.000 h

ldt intern: 8.2021

dimension: H=48 mm

protection type: IP54