


PROFLED-1200-40NW

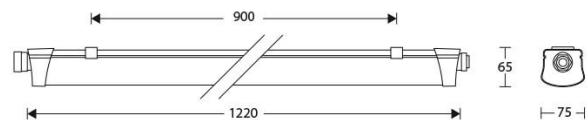

System power: 40 W

Luminous flux: 4700 lm

colour temperature: 4000 K

colour rendering index: CRI >80

beam angle: 140 °

connection voltage: AC 230 V

system efficiency: 118 lm/W

protection class: 2

mechanical load: IK08

colour: white/grey

material: polycarbonate

version: Dimmable and DALI on request

INFO*: Ambient temperature without DV: -20°C to +45°C, food safe

lifespan: L80 B10; 50.000 h

protection type: IP66

dimension: L=1220*W=75*H=65 mm

Adresse/Kontakt