


## PROFLED-1500-30NW

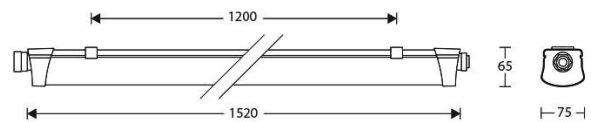

**System power:** 30 W

**Luminous flux:** 3300 lm

**colour temperature:** 4000 K

**colour rendering index:** CRI >80

**beam angle:** 140 °

**connection voltage:** AC 230 V

**system efficiency:** 110 lm/W

**protection class:** 2

**mechanical load:** IK08

**colour:** white/grey

**material:** polycarbonate

**version:** Dimmable and DALI on request

**INFO\*:** Ambient temperature without DV: -20°C to +45°C, food safe

**lifespan:** L70 B50; 50.000 h

**protection type:** IP66

**dimension:** L=1520\*W=75\*H=65 mm

### Adresse/Kontakt