


PASUP125A-4NW-0

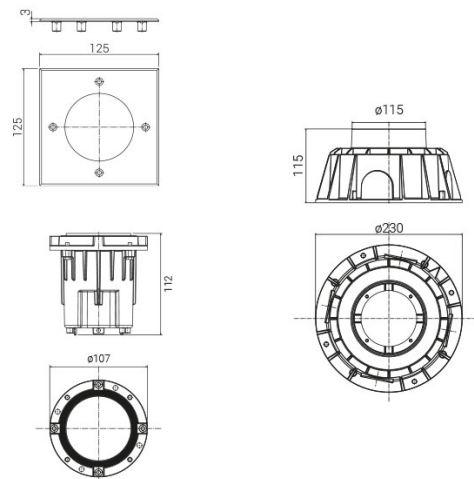

quantity lamps: 1

Light up with: LED

System power: 4 W

Luminous flux: 248 lm

colour temperature: 4000 K

colour rendering index: CRI >80

beam angle: 38 °

pivotable: 15 °

Power supply: with built-in driver

connection voltage: 230 V

operating current: 350 mA

system efficiency: 62 lm/W

protection class: 1

mechanical load: IK10

passable by persons: 2000 kg

weight: 1,589 kg

material: housing: stainless steel AISI 316 L

version: glass transparent 10 mm, square cover stainless steel

INFO*: incl. light body, cover, installation box and 2 way terminal block

protection type: IP67

lifespan: L80 B20; 60.000 h

ldt intern: 7.2021

EPDF! Lichtquelle: [870175](#)



Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de