


## PASUP125-4NW7-0

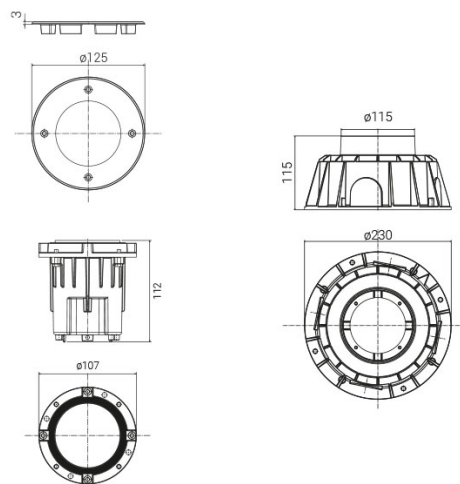

**quantity lamps:** 1

**Light up with:** LED

**System power:** 4 W

**Luminous flux:** 248 lm

**colour temperature:** 4000 K

**colour rendering index:** CRI >80

**beam angle:** 38 °

**pivotable:** 15 °

**Power supply:** with built-in driver

**connection voltage:** 230 V

**operating current:** 350 mA

**system efficiency:** 62 lm/W

**protection class:** 1

**mechanical load:** IK10

**passable by persons:** 2000 kg

**weight:** 1,439 kg

**colour:** metallized grey

**material:** housing: stainless steel AISI 316 L

**version:** glass transparent 10 mm, round cover aluminium


**INFO\*:** incl. light body, cover, installation box and 2 way terminal block

**lifespan:** L80 B20; 60.000 h

**protection type:** IP67

**ldt intern:** 7.2021

**EPREL Lichtquelle:** 870175



### Adresse/Kontakt