


PASUP70A-1WW-0

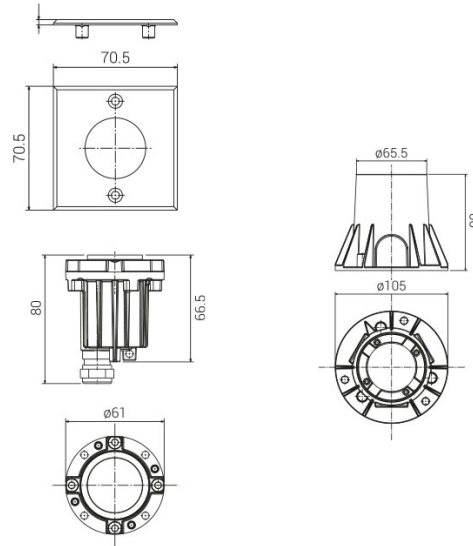

quantity lamps: 1

Light up with: LED

System power: 1 W

Luminous flux: 62 lm

colour temperature: 3000 K

colour rendering index: CRI >80

beam angle: 38 °

Power supply: with external driver

connection voltage: DC 24 V

system efficiency: 62 lm/W

protection class: 1

mechanical load: IK08

passable by persons: 1000 kg

material: housing: stainless steel AISI 316 L

version: glass transparent 6 mm, square cover stainless steel

INFO*: incl. light body, cover, external driver, installation box

lifespan: L80 B20; 60.000 h

protection type: IP67

ldt intern: 7.2021

EPREL Lichtquelle: [982678](#)



Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de