


LUXUF-8WW7



Bohrung der Zwischendecke
Vault ceiling hole
ø min. 115 mm - ø max. 116 mm

quantity lamps: 1
Light up with: LED
System power: 8 W
Luminous flux: 355 lm
colour temperature: 3000 K
colour rendering index: CRI >80
beam angle: 90 °
Power supply: with built-in driver
connection voltage: 230 V
system efficiency: 44 lm/W
protection class: 1
mechanical load: IK10
outside diameter: 125 mm
colour: light grey
material: aluminum
version: glass opal 10 mm
INFO*: vault ceiling hole min. Ø 115 mm, max. 116 mm
dimension: H=55 mm
protection type: IP67
lifespan: L80 B20; 60.000 h
ldt intern: 7.2021
EPREL Lichtquelle: [967077](#)

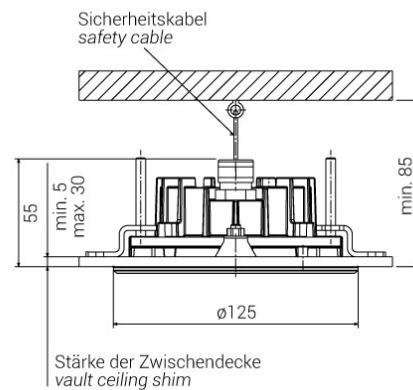

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
E-Mail: info@als.de | Web: www.als.de