


LUX30-10WW6



quantity lamps: 1
Light up with: LED
System power: 10 W
Luminous flux: 695 lm
colour temperature: 3000 K
colour rendering index: CRI >80
beam angle: 40 °
Power supply: with built-in driver
connection voltage: 230 V
system efficiency: 72 lm/W
protection class: 1
mechanical load: IK10
colour: anthracite
material: primary aluminum
version: Clear tempered glass diffuser
dimension: L=110*W=110*H=36,5 mm
ldt intern: 30.07.2021
lifespan: L80 B20; 60.000 h
protection type: IP65
EPREL Lichtquelle: [974562](#)

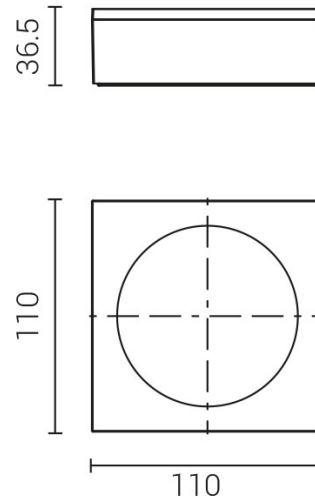

Adresse/Kontakt

A.L.S. Architektonische Lichtsysteme GmbH
 Mastorter Str. 31 | 88069 Tettnang (Germany)
 tel.: +49 7542 9344-0 | Fax: +49 7542 9344-30
 E-Mail: info@als.de | Web: www.als.de