


K3-4NW6B



quantity lamps: 4
Light up with: LED
System power: 16 W
Luminous flux: 496 lm
colour temperature: 4000 K
colour rendering index: 80
beam angle: 4x70 °
Power supply: with built-in driver
connection voltage: 230 V
operating current: 700 mA
system efficiency: 31 lm/W
protection class: 2
mechanical load: IK08
colour: anthracite
surface: UV-stabilized paint
material: die-cast aluminum
version: 4 emissions
dimension: L=100*W=102*H=100 mm
lifespan: L80 B20; 60.000 h
protection type: IP65
EPREL Lichtquelle: [982851](#)

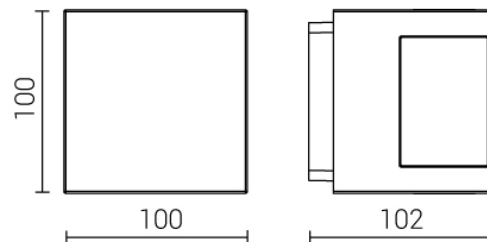

Adresse/Kontakt