


K3-2NW7PE

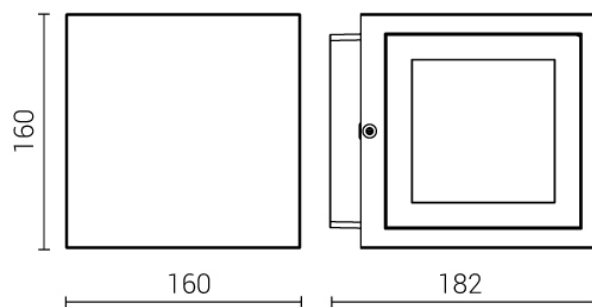

quantity lamps: 2

Light up with: LED

System power: 22 W

Luminous flux: 2120 lm

colour temperature: 4000 K

colour rendering index: 80

beam angle: 2x20 °

Power supply: with built-in driver

connection voltage: 220-240V 50/60Hz V

operating current: 350 mA

system efficiency: 96 lm/W

protection class: 2

mechanical load: IK08

colour: aluminium grey

surface: UV-stabilized paint

material: die-cast aluminum

version: 2 emissions

ldt intern: 29.06.21

dimension: L=160*W=182*H=160 mm

lifespan: L80 B20; 60.000 h

protection type: IP65

EPREL Lichtquelle: [871848](#)



Adresse/Kontakt