


K3-4WW6WB



quantity lamps: 4
Light up with: LED
System power: 32 W
Luminous flux: 672 lm
colour temperature: 3000 K
colour rendering index: 80
beam angle: 4x70 °
Power supply: with built-in driver
connection voltage: 50Hz, 220-240 V
operating current: 700 mA
system efficiency: 21 lm/W
protection class: 2
mechanical load: IK08
colour: anthracite
surface: UV-stabilized paint
material: die-cast aluminum
dimension: L=160*W=182*H=160 mm
lifespan: L80 B20; 60.000 h
ldt intern: 6.2021
protection type: IP65
EPREL Lichtquelle: [982678](#)

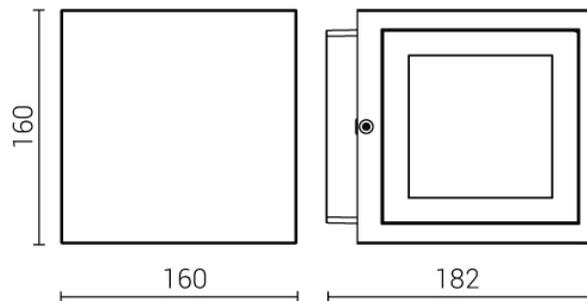

Adresse/Kontakt