

DESCRIPTION OF PARTS

LED pendant luminaire with canopy and power supply
L2008xW7xH16 mm
Aluminium frame, black
Opal cover

TECHNICAL DATA

LED pendant luminaire with external power supply unit
DC42V 220-240V 500mA
24W
Lichtfarbe: 3000K
IP class 20
Protection class: II
Wire suspension: L2000 mm
Not dimmable


LIGHT SOURCE

Light source: A.L.S. GmbH - EP830255-1-24WW1
This luminaire contains one light source of energy efficiency class F


LED DRIVER

Primary voltage: 220V/50Hz 500mA

The product consists of two components. Luminaire with light source and internal power supply.



The light source is only exchangeable by a professional.



The LED driver is only exchangeable by a professional.



Protection class II



CE label



The product is only for use in interiors.



The product may not be disposed of in the household garbage.



Do not attach deco material.



Not dimmable



Notification of Risks



Safety Instructions



Cleaning Instructions



It is not allowed to cover luminaires with heatinsulating cover sheet or similar materials!



Installation only by qualified and authorised persons.



Please be careful when touching the body of the LED lamp!

SAFETY



READ THE INSTRUCTIONS BEFORE USING THIS PRODUCT.
KEEP THE SAFETY AND OPERATING INSTRUCTIONS FOR FUTURE USE.



The light is suitable for lighting purpose indoors.



The luminaire is not suitable for mounting on uneven surfaces, softboard. The light may otherwise fall. This can result in product damage and / or injuries. **Check the mounting surface and adjust the mounting material to the ground.**



Do not let children play with the packaging film. Children can get caught up in it and suffocate while playing.



- Don't install under power.
- Follow the instruction manual for installation.
- Installation only by qualified and authorised persons.
- Do not use the product when it has been damaged (defective covers) or there are operational faults such as flickering, smoking, steaming, crackling noises or the smell of smoke.
- A damaged or defective product must be changed or repaired by the manufacturer, a service person or a comparable qualified person.
- Installation only under observance of the valid guidelines specific to application and country among others VDE 0.100.
- Never open one of the electrical operating agents or plug any objects into them. Such procedures signify a danger to life through electrical shock.
- Absolutely avoid contact between the product and water or other liquids. For reasons of electrical safety, the light may not be placed in contact with water or other liquids or submerged in water.
- The product may not be changed or modified.
- Make sure that the luminaire is never covered by heat insulating mats or thin materials. Make sure that the product has enough space for heat dissipation.
- Please be careful when touching the body of the LED lamp!



MAINTENANCE AND CLEANING

The light source is only exchangeable by a professional.



- Do not use solvents, such as benzene and similar agents. The light would be damaged thereby.
- Only use a dry, lint-free cloth for cleaning the product.

DISPOSAL

The packaging consists of environmentally friendly materials. Dispose of them in the local recycling containers.





Do not dispose of this product in the household garbage when it has reached the end of its lifecycle, but rather take it to a disposal center. Your local officials will provide you with information about collection offices and their business hours.

MPL

Pendant luminaire

MPL-24WW2

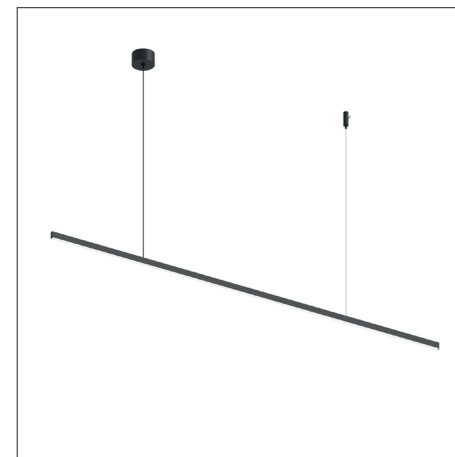

Black
matt



INTENDED USAGE

This product will only serve the purpose of illumination.

The light is only suitable for use in interiors, in dry, enclosed rooms.

SCOPE OF DELIVERY


1x LED pendant luminaire with canopy and power supply
1x Mounting set
Set of instructions for assembly, operation and safety

TECHNICAL CHANGES

Changes in the sense of technical progress can be made without prior notice.

address | contact

A.L.S. GmbH
Mastorter Str. 31 | 88069 Tettnang (Germany)
Tel.: +49 (0) 75 42 93 44-0 | Fax.: +49 (0) 75 42 93 44-30
E-Mail: info@als.de | Web: www.als.de

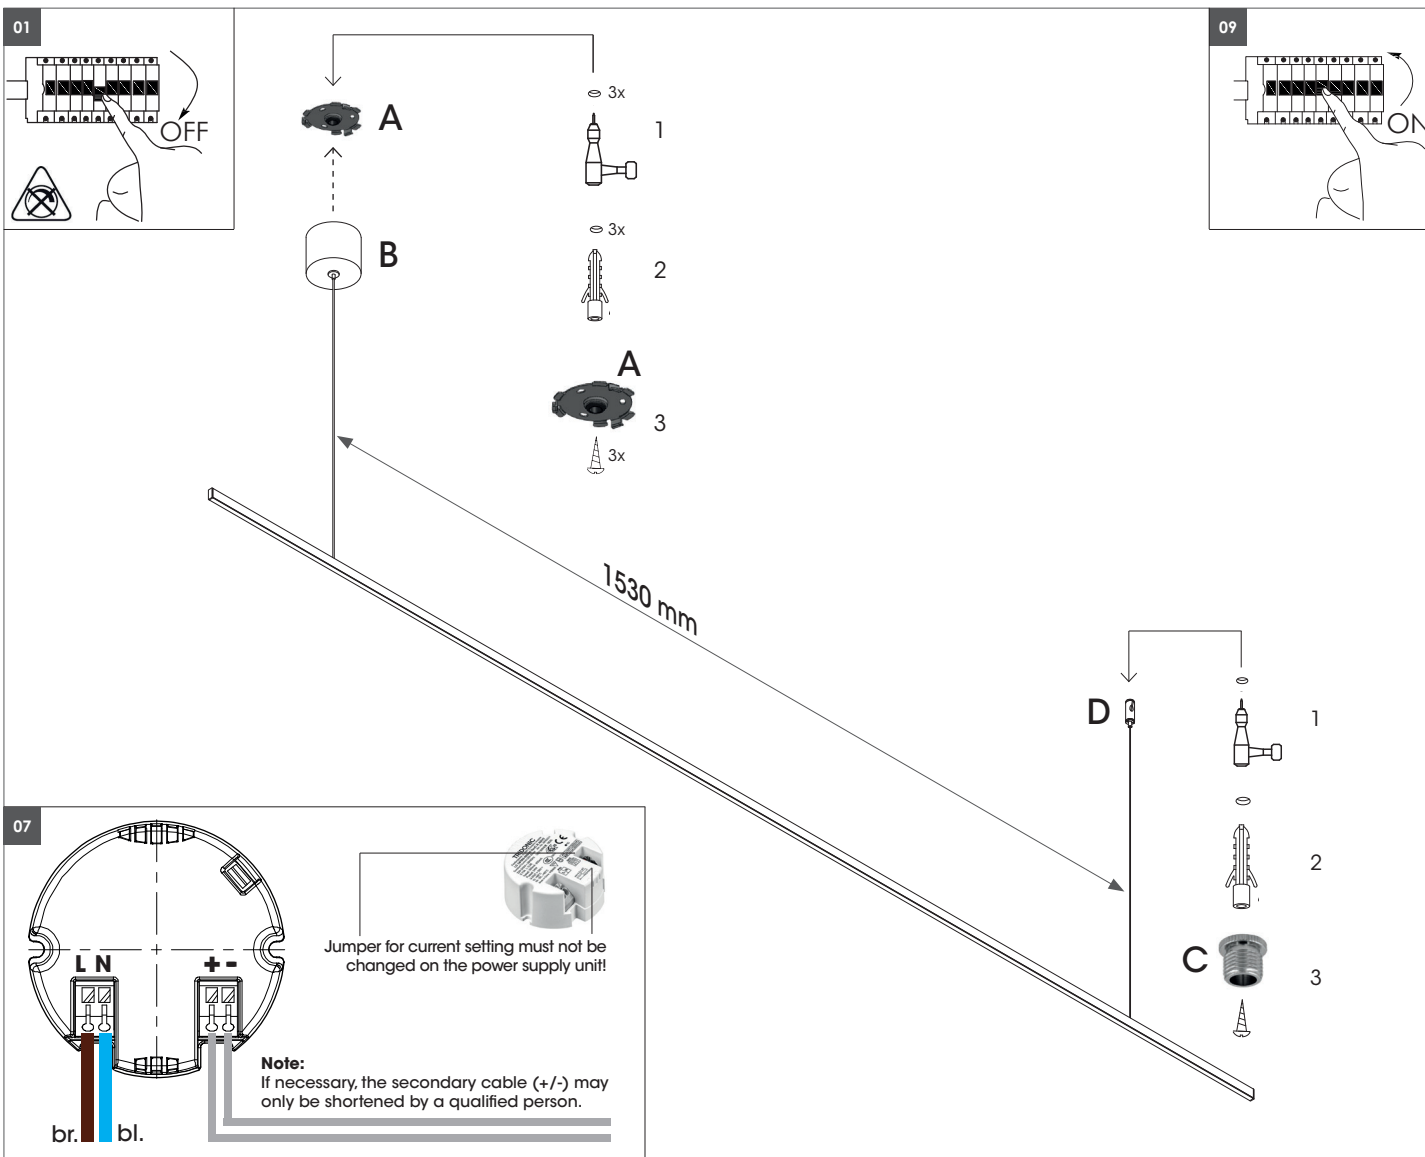

It is not allowed to cover the converter with heatinsulating cover sheet or similar materials! Additional drillings in the LED luminaire are not allowed! Do not place any object on the LED pendant luminaire.

Another installation / assembly / materials / types than provided in the manual sheets, release us from any electrotechnical and electrostatic responsibility.

Fixing materials:

The warranty is void if the buyer or a third party repairs or modifies the luminaire.

Carefully remove the LED luminaire from its packaging.



01 Turn off power supply before starting any installation.
Do not connect the device under power.

02 Remove the mounting plate (A) from canopy (B).

03 Transfer the drilling positions of the mounting plate (A) and the ceiling attachment (C) to the ceiling (drilling distance: 1530 mm). **Check for underlying installations before drilling!** Drill holes (1) in the ceiling and fit dowels (2).

04 Fasten the mounting plate (A) and ceiling fastening (C) (3).

05 The wire is fed in the gripper (D) and out through the side opening. The height of the lamp is adjusted by pressing the gripper in. Then screw the gripper into the ceiling fixing (C).

06 Slide the canopy down to fix the wire rope.

07 Connect the supply cable to the cable connection terminals on the power supply L and N in accordance with the electrical DIN VDE 0100 regulations. Only use the enclosed LED converter, do not use any other converters or transformers, as this could destroy the luminaire. **Jumper for current setting must not be changed!**

08 Place the canopy on the mounting plate and fasten it by turning it. Check canopy for tight fit. **Note: If necessary, the secondary cable (+/-) may only be shortened by a specialist.**

09 After mounting and connecting, switch on all poles of the mains voltage.